




**TIPO 1**

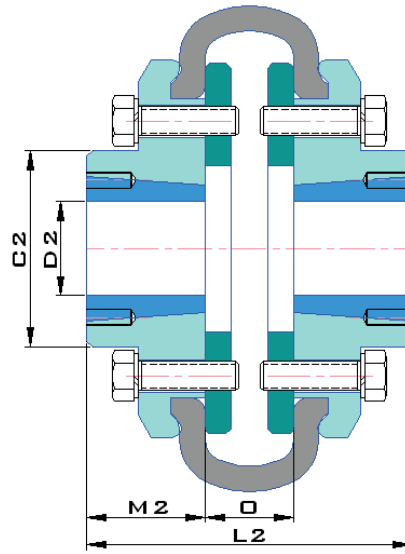


**TIPO 2**

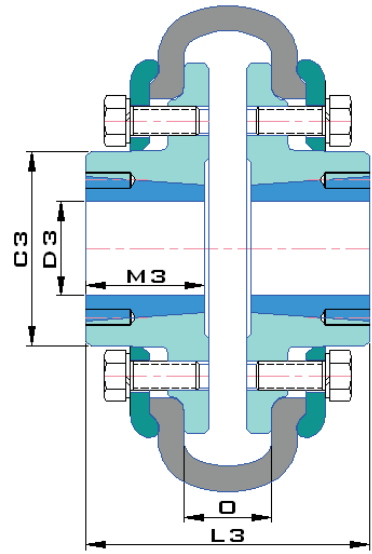


**TIPO 3**

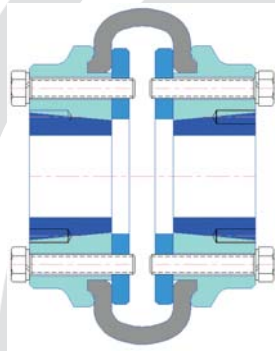

**MONTAJE  
H - H**

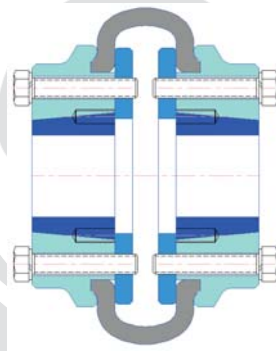

**MONTAJE  
F - F**

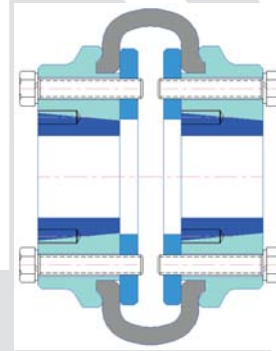

**MONTAJE  
H - F**

MODELO	EX40	EX50	EX60	EX70	EX80	EX90	EX100	EX110	EX120	EX140	EX160	EX200
TIPO	1	1	1	1	1	1	1 / 2	1 / 2	1 / 2	2 / 3	2 / 3	2 / 3
TAPER - LOCK BUSHING TAMAÑO	1008	1210	1610	1610	2012	2517	2517	3020	3020	3535	4040	4545
∅ A (MM)	108	133	165	187	213	235	254	279	314	359	422	508
∅ B (MM)	82	100	125	144	167	188	216	233	264	311	345	429
∅ C (MM)	73	80	104	117	126	155	184	202	227	275	320	276
∅ D MÁX.(MM)	25	32	42	42	50	63	63	76	76	102	115	127
L (MM)	63.8	75.4	83.3	88.9	102	128	132.6	141.3	146	230 201	271 240	313 272
M (MM)	22.2	25.4	25.4	25.4	31.8	44.5	44.5	50.8	50.8	127.0	146.1	161.9
O (MM)	19.3	24.4	32.5	38.1	38.1	38.9	43.4	39.6	44.5	52.1	68.1	83.8
Z (CANTIDAD X LADO)	4	5	5	5	6	6	6	6	6	8	8	12
PESO (KG) SIN BUSHING	1.8	2.6	4.5	6.7	9.7	15.4	23 21	27 23	40 37	70 87	80 87	165 146
R.P.M. MAX. [1/MIN]	4500	4500	4000	3600	3100	2800	2600	2300	2100	1840	1560	1300
MODELO	EX40	EX50	EX60	EX70	EX80	EX90	EX100	EX110	EX120	EX140	EX160	EX200
MOMENTO TORSOR NORMAL (KGM)	4.9	10.4	20.7	25.3	41.5	51.9	62.2	89.3	145.2	317.9	435.5	950.5

CT-7-13 REV.0